

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 1 010 675 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:

21.06.2000 Bulletin 2000/25

(51) Int. Cl.⁷: **C03C 8/24**, **C03C 8/14**,

H01M 8/02

(21) Application number: **99124312.2**

(22) Date of filing: **06.12.1999**

(84) Designated Contracting States:

**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE**

Designated Extension States:

AL LT LV MK RO SI

(30) Priority: **15.12.1998 US 112039 P**

(71) Applicant: **Haldor Topsoe A/S**

DK-2800 Lyngby (DK)

(72) Inventors:

• **Larsen, Jorgen Gutzon**

2880 Bagsvaerd (DK)

• **Larsen, Peter Halvor**

4000 Roskilde (DK)

• **Bagger, Carsten**

4000 Roskilde (DK)

(54) **High temperature sealing material**

(57) Glass composition for use as sealing material in fuel cells, comprising a glass matrix with main components consisting of SiO_2 , Al_2O_3 , and one or more compounds from group I metal oxides and/or group II metal oxides, and a filler material evenly dispersed in the matrix, wherein the filler material consists of particles of one or more refractive compounds from the group: $\text{MgO-MgAl}_2\text{O}_4$, stabilized zirconia, rare earth oxides, $(\text{Mg,Ca})\text{SiO}_3$, Mg_2SiO_4 , MgSiO_3 , CaSiO_3 , CaZrO_3 , ThO_2 , TiO_2 , $\text{M}^{\text{II}}\text{AlSi}_2\text{O}_8$, where $\text{M}^{\text{II}} = \text{Ca, Sr or Ba}$.

EP 1 010 675 A1

Description

BACKGROUND OF THE INVENTION

- 5 [0001] The invention concerns a glass composition for use as sealing material in fuel cells, preferably in the solid oxide fuel cells (SOFC) of the stacked planar type. Typically, such fuel cells are composed of Y-stabilized ZrO_2 (YSZ) electrolyte with electrodes and contact layers to the electron conducting plate Interconnect (IC), which makes the series connection between the cells. Gas tight sealings are vitally important for the performance, durability and safety operation of the fuel cells including the manifold and heat exchanger.
- 10 [0002] The difficulties in providing a suitable sealing material are numerous:
- [0003] The sealing material should be able to adhere to the fuel cell components at a heat treatment not higher than 1300°C which is the maximum temperature heat treatment of a fuel cell stack, and be resilient in order to take up deformations, e.g. due to TEC differences between the fuel cell components, and at the same being able to withstand a certain overpressure at the operation temperature which require a viscosity of more than $10^5 \text{dPas} \cdot \text{s}$. The thermal expansion coefficient (TEC) should be in the range $9-13 \cdot 10^{-6} \text{K}^{-1}$ in order not to initiate cracks in the fuel cell components. Furthermore, the sealing material has to be stable over a time span of say 40.000 h without deteriorating crystallization or reactions with the other materials as well as with the ambient gasses, atmosphere containing steam, methane, hydrogen, carbonmonoxide and carbondioxide or nitrogen and oxygen.
- 15 [0004] Glass or glass ceramic seals may fulfil the requirements established above and according to literature quite a range of potential glasses have been reported:
- 20

Table 1

SOFC SEALING MATERIALS

Alkaline oxide silicate glasses

- $\text{Na}_2\text{O}-\text{CaO}-\text{SiO}_2$
- $\text{Li}_2\text{O}-\text{ZnO}-\text{Al}_2\text{O}_3-\text{SiO}_2$ and $\text{MgO}-\text{ZnO}-\text{SiO}_2$
- Alkali- $\text{Al}_2\text{O}_3-\text{SiO}_2$
- Alkali- $\text{B}_2\text{O}_3-\text{SiO}_2$
- $\text{Na}_2\text{O}-\text{SiO}_2$
- $\text{Li}_2\text{O}-\text{SiO}_2$

Mica Glass Ceramics

- Commercially available mica glass-ceramic

Alkaline-Earth Oxide Borosilicate/Silicaborate Glasses

- Alkaline-Earth- $\text{B}_2\text{O}_3-\text{SiO}_2$
- $\text{SrO}-\text{La}_2\text{O}_3-\text{Al}_2\text{O}_3-\text{B}_2\text{O}_3-\text{SiO}_2/\text{SiO}_2-\text{B}_2\text{O}_3$
- $\text{BaO}-\text{As}_2\text{O}_3-\text{Al}_2\text{O}_3-\text{B}_2\text{O}_3-\text{SiO}_2$

Alkaline-Earth Alumina Silicates

- SiO_2 based glass-ceramics
- $\text{MgO}-\text{Al}_2\text{O}_3-\text{SiO}_2$
- $\text{CaO}-\text{Al}_2\text{O}_3-\text{SiO}_2$

[0005] According to Ley et al. (1996), each of these glass types have a drawback: the alkalis and alkali silicates and borates will react with the fuel cell components. The alkali borate glasses have too low TEC and soda-lime glasses too low viscosity.

55 [0006] In contrast several glass compositions within the $\text{SrO}-\text{La}_2\text{O}_3-\text{Al}_2\text{O}_3-\text{B}_2\text{O}_3-\text{SiO}_2$ system should be suitable (K.L. Ley, M. Krumpelt, R. Kumar, J.H. Meiser & I. Bloom, 1996, J. Mater. Res., Vol. 11, No 6, pages 1489-1493).

[0007] The present invention is in contrast to the conclusion of the authors above based on highly viscous polymerized alkali-alumina-silicate glass seals, which are reluctant to crystallize at elevated temperature. An example of a

- highly polymerized glass is pure SiO_2 glass, which has a polymerized 3D network (as the crystalline phase, quartz) based on SiO_4^{4-} tetrahedra, where each oxygen ion connects two Si ions (B.E. Warren & Biscoe, 1938, J. Am. Ceram. Soc. 21, page 29). By addition of group I, II and III metal oxides this network is broken and the softening point, the viscosity and the melting point decreases significantly. It is possible to retain a polymerized structure of the melt with a high viscosity by substituting SiO_2 with NaAlO_2 (D.C. Boyd & D.A. Thompson, in Ullmann, Vol. 11, page 815). Accordingly, a $\text{NaAlSi}_3\text{O}_8$ melt has a high viscosity of $10^{8.5}$ dPas \cdot s at 1120°C (H. Rawson, 1967, Academic Press, London and New York, page 89). This melt is assumed to have a 3D network ($\text{Si}_{1-x}\text{Al}_x\text{O}_4^{4-x}$ network structure, where $x\text{Na}^+$ compensate the extra negative charge, similar to the 3D network in the mineral albite with the same composition. Crystallization from such a highly viscous melt held nearly 100°C below the melting point may take years due to the high viscosity (H. Rawson, 1967). By addition or subtraction of NaAlSiO_4 , SiO_2 , it is possible to reach two eutectic melting temperatures at 1062° and 1068° at compositions: NaAlSiO_4 : SiO_2 , 37.0 : 63.0 wt% and 65.0 : 35 wt%, respectively (J.F. Schairer, J. Geol. 58, No 5, 514, 1950). For the system: KAlSiO_2 , SiO_2 , an eutectic point of $990 \pm 20^\circ\text{C}$ may be obtained at a composition of KAlSiO_4 : SiO_2 equal to 32.8 : 67.2 wt% (J.F. Schairer, N.L. Bowen, Bull Soc. Geol. Finland, 20.74 (1947).
- [0008] The TEC of a $\text{NaAlSi}_3\text{O}_8$ glass is $7.5 \cdot 10^{-6} \text{K}^{-1}$, which is lower than the SOFC components $10.0\text{--}13 \cdot 10^{-6}$. The TEC of the albite glass can be increased slightly by addition of NaAlO_2 , whereas a value of $10.4 \cdot 10^{-6} \text{K}^{-1}$ may be obtained by addition of Na_2O giving a cation composition of $\text{Na}_{3.33}\text{Al}_{1.67}\text{Si}_5$ (O.V. Mazurin, M.V. Streltsina & T.P. Shvaikoshvaikoshkaya, Handbook of glass data, part C, page 371, from K. Hunold & R. Brückner, 1980a, Glastechn. Ber. 53, 6, pages 149-161). Higher values up to more than $12 \cdot 10^{-6} \text{K}^{-1}$ can be obtained by further addition of Na_2O according to these authors.
- [0009] An example of a $\text{NaAlSi}_3\text{O}_8$ + Na_2O TEC matched glass for sealing yttria stabilized zirconia is shown in Fig. 1. Addition of K_2O will have an even higher effect on the TEC.
- [0010] Addition of Na_2O and K_2O alone will decrease the viscosity and the T_{glass} and $T_{\text{softening}}$ as illustrated in Table 2 for Na_2O , which will be necessary for operation temperatures below 1000°C .

Table 2

	$T_g(^{\circ}\text{C})$	$T_s(^{\circ}\text{C})$
11.8 Na_2O -19.4 Al_2O_3 -68.7 SiO_2	786	910
17.1 Na_2O -14.9 Al_2O_3 -68.0 SiO_2	515	607
11.8 Na_2O -19.4 Al_2O_3 -68.7 SiO_2 +YSZ	814	929

- [0011] Alkali-addition, however, will cause an increased reaction rate with the other fuel cell components and an evaporation of sodium and potassium, so that this solution is best suited for low operation temperatures. Small amounts of BO_3 addition can also be used to decrease the melt temperature and viscosity. An alternative to the addition of alkalis in order to increase the TEC is to use fillers with a high TEC and (Y. Harufuji 1992: Japanese Patent No 480,077 A2) and (Y. Harufuji 1994, Japanese Patent No 623,784 A2) thus Harufuji mentions different fibres of carbon, boron, SiC, polytitanocarbosilane, ZrO_2 and Al_2O_3 and powders of Al_2O_3 , ZrO_2 , SiO_2 , MgO , Y_2O_3 and CaO and Al, Ag, Au and Pt. To this list we can add stabilized ZrO_2 , TiO_2 , MgO - MgAl_2O_4 composites, $(\text{Mg,Ca})\text{SiO}_3$, Mg_2SiO_4 , MgSiO_3 , CaSiO_3 , CaZrO_3 and $\text{M}^{\text{II}}\text{AlSi}_2\text{O}_8$, where $\text{M}^{\text{II}} = \text{Ca}$, Sr and/or Ba (rare earth oxides, e.g. CeO_2 , Eu_2O_3 and ThO_2) ($\text{Li}_2\text{Si}_2\text{O}_5$ may be used at temperatures below 1000°C).
- [0012] Other alkalisilicates may be used as fillers for low temperature operation. A combination of alkali and filler addition can be used to obtain optimal TEC, viscosity and the softening point T_s . Also addition of small amounts ($< \text{wt}\%$) B_2O_3 instead of or together with Na_2O combined with addition of high TEC fillers mentioned above is a possibility. The filler addition will reduce the exposed surface of the glass and thus the evaporation of the more volatile constituents of the glass.
- [0013] Deteriorating reactions may involve:

- (1) SiO evaporation may occur under reducing condition on the anode side condensation may take place in other areas of the fuel cell system. Apparently this process is slow.
- (2) Volatile sodium and potassium may react with the other fuel cell materials, e.g. the chromite of the interconnection plate. The evaporation is strongly influenced by the sodium surplus of the glass. For this reason the sealing glasses with alkali/Al-ratios above 1 should only be used in fuel cells with low operation temperatures.

SUMMARY OF THE INVENTION

[0014] According to the invention there is provided a glass composition comprising a glass matrix with main components consisting of SiO_2 , Al_2O_3 and one or more compounds from group I metal oxides, and a filler material evenly dispersed in the matrix, wherein the filler material consists of particles of one or more refractive compounds from the group: (Al_2O_3 , MgO), rare earth oxides, $\text{MgO-MgAl}_2\text{O}_4$ composites, stabilized zirconia, $(\text{MgCa})\text{SiO}_3$, Mg_2SiO_4 , MgSiO_3 , CaSiO_3 , CaZrO_3 , ThO_2 , TiO_2 and the $\text{M}^{\text{II}}\text{AlSi}_2\text{O}_8$, where M^{II} = Ca, Sr and/or Ba. For low temperature application alkalisilicate fillers may be used.

[0015] The filler material is added to the sealing glass in order to adjust the thermal expansion coefficient, so that it matches the TEC of the other parts of the fuel cell in addition the stability of the glass may be improved and the viscosity increased.

[0016] Preferred embodiments of the composition contain Na_2O or K_2O or both in the amounts as indicated in claims 2 and 3 in order to reach an optimum TEC, while at the same time avoiding too much alkali metal that may react with the other materials in the cell stack.

[0017] One or more compounds of group II metal oxide may be components of the glass matrix as indicated in claim 4.

[0018] Known glass compositions with main components comprising SiO_2 , Al_2O_3 , and one or more compounds from group I or group II metal oxides are advantageous for sealing fuel cells with gas separators of La-Sr/Ca/Mg-Cr/V-O interconnections of ceramic material or a metal alloy, e.g. Cr-Fe- Y_2O_3 material and with an operating temperature above 600°C , cf. claims 6 and 7. In particular, compositions that within the glass have evenly dispersed a refractive filler material consisting of particles of one or more compounds from the group: MgO , $\text{MgO-MgAl}_2\text{O}_4$ composites, stabilized zirconia rare earths (especially Eu_2O_3 and CeO_2), ThO_2 , TiO_2 , $(\text{MgCa})\text{SiO}_3$, Mg_2SiO_4 , MgSiO_3 , CaSiO_3 , CaZrO_3 , $\text{M}^{\text{II}}\text{AlSi}_2\text{O}_8$, M^{II} = Ca, Sr/or Ba and ThO_2 , TiO_2 .

[0019] In a preferred embodiment of the invention commercially available feldspar or nepheline syenite starting materials may be used for making the basic glass material.

[0020] The starting material is melted at about 1550°C for one hour in an alumina or platinum crucible. The melted material is then quenched in water, crushed and ground to glass powder with a particle size of less than $90\text{ }\mu\text{m}$. The glass powder having a TEC of about $75 \times 10^{-7}/\text{K}$ is then mixed with a filler, e.g. MgO (TEC $130 \times 10^{-7}/\text{K}$) with a grain size of less than $10\text{-}40\text{ }\mu\text{m}$ in ratio of 2:3.5 (vol.) in order to obtain a TEC of $110 \times 10^{-7}/\text{K}$.

[0021] Glass sealings are produced by filling the mixed powder into graphite forms followed by stamping and removal of excess of powder. The powder is then sintered in a furnace in N_2 -atmosphere at 750°C for 5 hours and at 1300°C , for one hour. Glass seals for narrow gaps $< 1\text{ mm}$ (e.g. in the electrode area) are produced by tape-casting of glass and filler mixtures.

Example 1

[0022] A commercial available feldspar ($\text{SiO}_2 = 68.4$, $\text{Al}_2\text{O}_3 = 19.1$, $\text{Fe}_2\text{O}_3 = 0.1$, $\text{CaO} = 2.0$, $\text{Na}_2\text{O} = 7.5 = \text{K}_2\text{O} = 2.8$; melt point 1270°C) is melted at 1550°C in one hour in a Al_2O_3 or Pt crucible. Subsequently, the melt is quenched in water from 1000°C , crushed and grounded to $\leq 90\text{ }\mu\text{m}$ in a porcelain mill half filled with porcelain balls. The glass powder thus obtained with a TEC of $\sim 75 \times 10^{-7}/\text{K}$ is mixed with the preferred filler of calcined (1700°C) MgO with a TEC of $130 \times 10^{-7}/\text{K}$ and a grain size of $10\text{-}40\text{ }\mu\text{m}$ in a ratio of glass : MgO of 2:3.5 in order to obtain a TEC of $110 \times 10^{-7}/\text{K}$. Glass sealings in the shape of triangular rods are produced by filling the mixed powder into a graphite cast form with V-shaped grooves, followed by stamping and removal of excess powder. The composition is sintered in a furnace in N_2 -atmosphere at 750°C for 5 hours and at 1300°C for 2 hours. The produced triangular rods may be machined to the wanted dimensions. If the viscosity is too high addition of small amounts ($< 5\%$) B_2O_3 and/or Na_2O may be an advantage.

Example 2

[0023] As in Example 1 except that the commercial feldspar powder ($< 90\text{ }\mu\text{m}$) is mixed with the calcined (1700°C) MgO powder and melted in graphite cast forms above 1300°C for 5 hours.

Example 3

[0024] Glass is produced from dried powder of:

SiO_2	1442,08 g ($< 1\text{ }\mu\text{m}$)
Al_2O_3	407,84 g ($< 1\text{ }\mu\text{m}$)

Na₂CO₃ 423,9 g (>1 µm)

[0025] The powder is mixed in a 5 litre PE bottle with 20-30 mm porcelain balls for 24 hours. The powder is poured into Al₂O₃ crucibles and heated to 1550°C for 2 hours and subsequently quenched from 600°C in H₂O. The quenched materials thus obtained is crushed to <9 mm grains and grounded in a porcelain mill for 17 hours with 20-30 mm sized balls to glass powder with a particle size of less than 100 µm.

[0026] The glass powder is then mixed with 50 wt%, ZrO₂ stabilized with 8 mole% Y₂O₃ spherical 40-60 µm powder, calcined at 1700°C and poured into a graphite cast form, as described in Example 1, and then sintered at 750°C for 5 hours and at 1125°C for one hour followed by oven cooling. At Fig. 1 the expansion curve is given for this mixture.

Example 4

[0027] Glass, produced as in Example 1 or 2, and a filler material (e.g. MgO or yttria stabilized zirconia) are mixed by ball milling for 2 hours with a dispersing agent, polyvinylpyrrolidone dissolved in methylethylketone and ethanol. Subsequently, a binder mixture of polyvinylbutyral, dibutylphthalate, polyethyleneglycol, Additol (Hoechst) (dissolved in methylethylketone and ethanol) is added and the ball milling is continued for 24 hours. The so-produced slurry is casted onto a moving substrate and allowed to dry for 24 hours before removal.

[0028] The green tapes are cut into the desired dimensions and are applied to the sealing area in the green state. The sealing is achieved by a subsequent heat treatment up to 1200°C using a temperature ramp below 50°C/h in the range up to 500°C.

Example 5

[0029] A composition according to Beall (1986) (J.H. Simmons, D.R. Uhlmann, G.H. Beall (eds.) in 1982: Advances in Ceramics, Vol. 4, page 291, Am. Ceram. Soc.) of:

SiO ₂	38.9
Al ₂ O ₃	13.7
MgO	11.0
SrO	10.1
BaO	14.0
MgF ₂	12.6

is produced by mixing the oxide components and MgF₂ in a high intensity vibration mill with Al₂O₃ balls. The composition is then melted at 1550°C for one hour. The thus produced glass is milky with a TEC of 110 x 10⁻⁴/K according to Beall (1986). The glass is rather viscous and did not adhere well to the cell stack material. The adherence to these materials can be improved by addition of small amounts (up to 5%) of B₂O₃ and/or alkaline metals.

Claims

1. A glass composition for use as sealing material in fuel cells, characterized in comprising a glass matrix with main components consisting of SiO₂, Al₂O₃, and one or more compounds from group I metal oxides and/or group II metal oxides, and a filler material evenly dispersed in the matrix, wherein the filler material consists of particles of one or more refractive compounds from the group: MgO-MgAl₂O₄, stabilized zirconia, rare earth oxides, (Mg, Ca)SiO₃, Mg₂SiO₄, MgSiO₃, CaSiO₃, CaZrO₃, ThO₂, TiO₂, M^{II}AlSi₂O₆, where M^{II} = Ca, Sr or Ba.
2. A glass composition according to claim 1, characterized in that the glass matrix contains Al₂O₃ and Na₂O, where the stoichiometric molar ratio Al₂O₃ : Na₂O is in the range of 0.1-1.3.
3. A glass composition according to claim 1, characterized in that the glass matrix contains Al₂O₃ and K₂O, where the stoichiometric molar ratio Al₂O₃ : K₂O is in the range of 0.1 to 1.3.
4. A glass composition according to claim 1 including fluorine atoms as partial crystallizer forming a glass ceramic.
5. A glass composition according to anyone of the preceding claims comprising additionally 0.1-10% of B₂O₃.
6. Use of a glass composition with main components comprising SiO₂, Al₂O₃, and one or more compounds from group I metal oxides for sealing fuel cells at an operating temperatures up to 1000°C.

7. Use of a glass composition with main components comprising SiO_2 , Al_2O_3 , and one or more compounds from group II metal oxides for sealing fuel cells at operating temperatures up to 1000°C .
8. Use of a glass composition according to claim 5 or 6, characterized in that within the glass there is evenly dispersed a filler material consisting of particles of one or more compounds from the group: $\text{MgO-MgAl}_2\text{O}_4$, stabilized zirconia, rare earth oxides, $(\text{Mg,Ca})\text{SiO}_3$, Mg_2SiO_4 , MgSiO_3 , CaSiO_3 , CaZrO_3 , ThO_2 , TiO_2 and $\text{M}^{\text{II}}\text{AlSi}_2\text{O}_8$, where $\text{M}^{\text{II}} = \text{Ca}^{2+}$, Sr^{2+} and/or Ba^{2+} , $\text{Li}_2\text{Si}_2\text{O}_5$ may be used as filler at operation temperatures up to 1000°C and other alkalisilicates at lower temperatures.

10

15

20

25

30


35

40

45

50

55

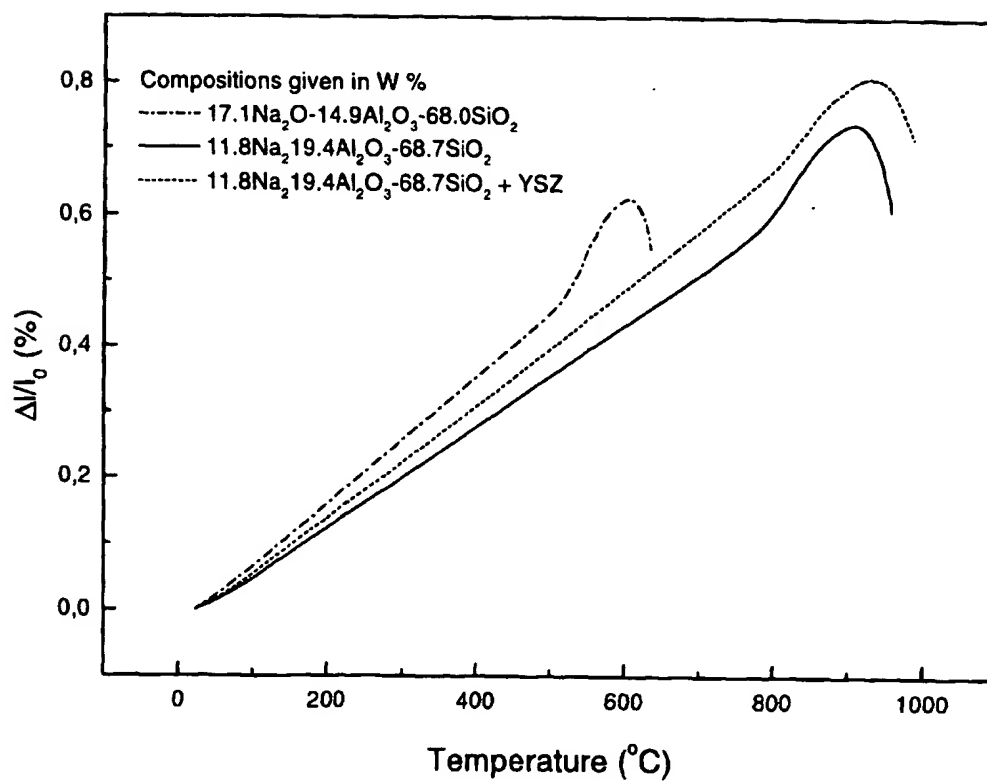



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 99 12 4312

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
E	EP 0 982 274 A (CORNING INC) 1 March 2000 (2000-03-01) * page 5, line 15 - line 22 *	1-3,6-8	C03C8/24 C03C8/14 H01M8/02
P,X	EP 0 897 897 A (SIEMENS AG) 24 February 1999 (1999-02-24) * column 2, line 18 - column 3, line 1 *	1,5-8	
X	DATABASE COMPENDEX 'Online! ENGINEERING INFORMATION, INC., NEW YORK, NY, US EICHLER K ET AL: "BAS (BaO DOT Al2O3 DOT SiO2)-glasses for high temperature applications" Database accession no. EIX99484844998 XP002134658 * abstract * & PROCEEDINGS OF THE 1998 6TH INTERNATIONAL CONFERENCE ON ELECTROCERAMICS AND THEIR APPLICATIONS; MONTREAU, SWITZ AUG 24-AUG 27 1998, vol. 19, no. 6-7, 24 August 1998 (1998-08-24), pages 1101-1104, J Eur Ceram Soc; Journal of the European Ceramic Society 1999 Elsevier Science Ltd, Exeter, Engl	1,7	TECHNICAL FIELDS SEARCHED (Int.Cl.7) C03C H01M
X	US 5 179 047 A (CHIBA JIRO) 12 January 1993 (1993-01-12) * claims; tables *	1-8	
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 3 April 2000	Examiner Reedijk, A
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03/82 (PouCon)



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 99 12 4312

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	<p>DATABASE INSPEC 'Online! INSTITUTE OF ELECTRICAL ENGINEERS, STEVENAGE, GB SAKAKI Y ET AL: "Glass-ceramics sealants in CaO-Al/sub 2/O/sub 3/-SiO/sub 2/ system" Database accession no. 5978692 XP002134659 * abstract *</p> <p>& PROCEEDINGS OF THE FIFTH INTERNATIONAL SYMPOSIUM ON SOLID OXIDE FUEL CELLS (SOFC-V), PROCEEDINGS OF SOFC MEETING (ISBN 1 56677 145 5), AACHEN, GERMANY, 2-5 JUNE 1997, pages 652-660, 1997, Pennington, NJ, USA, Electrochem. Soc, USA ISBN: 1-56677-145-5</p> <p>---</p>	1-8	<p>TECHNICAL FIELDS SEARCHED (Int.Cl.7)</p>
A	<p>DATABASE WPI Section Ch, Week 198527 Derwent Publications Ltd., London, GB; Class L01, AN 1985-161555 XP002134660 & JP 60 090850 A (NIPPON ELECTRIC GLASS CO), 22 May 1985 (1985-05-22) * abstract *</p> <p>---</p>	1-8	
X	<p>US 4 624 934 A (KOKUBU YOSHINORI ET AL) 25 November 1986 (1986-11-25) * the whole document *</p> <p>-----</p>	1,7	
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 3 April 2000	Examiner Reedijk, A
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons</p> <p>----- & : member of the same patent family, corresponding document</p>			

EPO FORM 1500 (03.92) (PctOn)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 99 12 4312

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

03-04-2000

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
EP 0982274	A	01-03-2000	NONE		
EP 0897897	A	24-02-1999	NONE		
US 5179047	A	12-01-1993	JP 2971502	B	08-11-1999
			JP 3275531	A	06-12-1991
JP 60090850	A	22-05-1985	NONE		
US 4624934	A	25-11-1986	JP 1730872	C	29-01-1993
			JP 4011495	B	28-02-1992
			JP 60235744	A	22-11-1985

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82